




### Débitmètre et régulateur de débit

#### Application :

Pour emploi dans le solaire thermique, le chauffage et l'hydronique

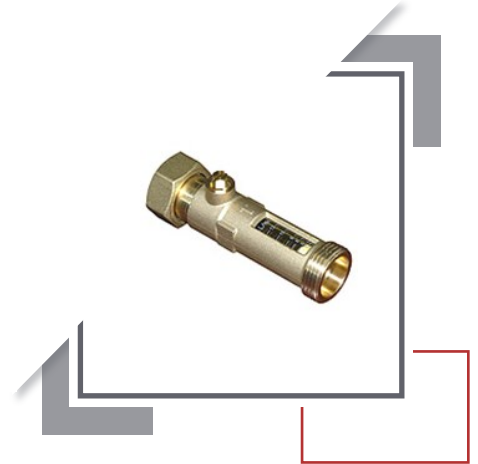

DIMENSIONS (mm)								
Réf	654				655			
Raccord	Mâle / Mâle				Mâle / Femelle - Écrou tournant			
Dimension raccord	3/4"G	1"G	1"1/4 G	1"1/2 G	3/4"G	1"G	1"1/4 G	1"1/2 G
A	105	102	128.5	144.5	114.5	107	131.5	134
B	25.4	22.4	30	38	35.4	27.5	33	27.5
C	-	-	-	-	8.2	12	11.5	10.8
CH	-	-	-	-	30	36.5	45	52
DN	15	15	20	20	15	15	20	20
Poids (g)	281	274	568	763	328	365	640	732

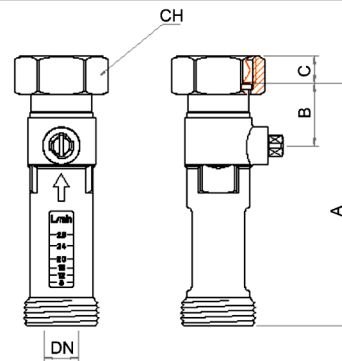

CARACTÉRISTIQUES TECHNIQUES		PLAGES DE RÉGULATION (l/min)				
Corps	Laiton CW617N	3/4"G	1-6	2-12	8-38	
Sphère	Laiton CW641N	1"G	2-12	8-38	5-42	20-70
Raccord	BSP cylindrique	1"1/4 G		5-42	20-70	
T° de service	0° C ... 120° C	1"1/2 G		5-42	20-70	
PMS	10 bar					